

PEP WAVE

Broadband Possibilities

AP One

User Manual

Document Rev.3.0.10

Nov-11

COPYRIGHT & TRADEMARKS

Specifications are subject to change without notice. Copyright © 2011 Pepwave Ltd. All Rights Reserved. Pepwave and the Pepwave logo are trademarks of Pepwave Ltd. Other brands or products mentioned may be trademarks or registered trademarks of their respective owners.

Table of Contents

TABLE OF CONTENTS.....	2
1 INTRODUCTION AND SCOPE	4
2 PRODUCT FEATURES.....	5
3 PACKAGE CONTENTS	6
3.1 AP ONE.....	6
3.2 AP ONE MINI	6
3.3 AP ONE X	6
4 HARDWARE OVERVIEW	7
4.1 AP ONE.....	7
4.2 AP ONE MINI	8
4.3 AP ONE X	9
5 INSTALLATION.....	11
5.1 INSTALLATION PROCEDURES.....	11
6 INFORMATION.....	12
6.1 SYSTEM.....	12
6.2 WIRELESS.....	13
7 CONFIGURATION.....	18
7.1 SYSTEM.....	18
7.2 WIRELESS NETWORKS	22
7.3 ADVANCED WIRELESS SETTINGS.....	35
7.4 WDS	38
7.5 SNMP.....	39
7.6 WEB ADMINISTRATION.....	42
8 TOOLS - DIAGNOSTIC TOOLS.....	44
9 COMMANDS	45
9.1 ACTIVATE CHANGES	45
9.2 FIRMWARE	46
9.3 CONFIGURATION.....	47
9.4 MISC	48
10 REAL TIME STATUS	49
11 PEPLINK BALANCE AP CONTROLLER.....	49
12 RESTORATION OF FACTORY DEFAULTS.....	50
12.1 AP ONE.....	50
12.2 AP ONE MINI	50
12.3 AP ONE X	50

User Manual

Pepwave AP One

APPENDIX A..... 51

1 Introduction and Scope

Pepwave AP One is an enterprise grade 802.11b/g/n Wi-Fi access point with centralized management system. It is a powerful solution for building wireless networks for all business needs. Each Pepwave AP One is loaded with essential features such as Multiple SSID, VLAN, WDS and Guest Protect.

One Pepwave AP One can masquerade up to 4 different access points. Each virtual access point can have its own security policy (e.g. WPA, WPA2, etc.) and authentication mechanism (e.g. 802.1x, open, captive portal, etc), to facilitate building your network much faster, easier and more cost-effective than ever before. Pepwave AP One comes with a high-power Wi-Fi transmitter which greatly enhances coverage and performance.

2 Product Features

Key features of Pepwave AP One:

- High-power output enhances coverage and lowers cost of ownership
- Independent security policies and encryption mechanisms per virtual AP
- Centralized management via InControl
- WDS Support for secure and fast network expansion
- Guest Protect Support
- WMM (Wi-Fi Multimedia) and QoS (Quality of Service) Support

3 Package Contents

3.1 AP One

The following items are the contents of a Pepwave AP One package:

- 1 x Pepwave AP One unit
- 1 x Omni-directional Antenna
- 1 x Power Supply Unit
- 1 x Instruction Sheet

3.2 AP One mini

The following items are the contents of a Pepwave AP One mini package:

- 1 x Pepwave AP One mini unit
- 1 x Omni-directional Antenna
- 1 x Power Supply Unit
- 1 x Instruction Sheet

3.3 AP One X

The following items are the contents of a Pepwave AP One X package:

- 1 x Pepwave AP One X unit
- 1 x Omni-directional Antenna
- 1 x Instruction Sheet
- 1 x Installation Guide

User Manual

Pepwave AP One

4 Hardware Overview

4.1 AP One


Front View







Rear Panel View



Connectors

Antenna (Left-most Connector)	A RP-SMA connector for connecting the antenna.
WAN 	A 10/100BaseT Ethernet connector, normally to be connected to back haul network.
Reset	A reset button to be depressed with a pin. Depress and hold for at least 5 seconds to restore factory defaults. For further details, please refer to Section 12, Restoration of Factory Defaults.
Power Connector	A connector for DC 12V power input, to be connected with the supplied power adaptor.

LED Indicators

 Power	OFF – Power off ON – Power on
 Status	OFF – The unit is initializing. ON – The unit is ready.
 Ethernet	OFF – The Ethernet port is not connected. ON – The Ethernet port is connected.
 Wireless	OFF – Wireless is not ready. On – Wireless is ready.

User Manual

Pepwave AP One

4.2 AP One Mini

Front View



Rear Panel View




Connectors

Antenna (Right-most Connector)	A RP-SMA connector for connecting the antenna.
WAN	A 10/100BaseT Ethernet connector, normally to be connected to back haul network.
Power Connector	A connector for DC 12V power input, to be connected with the supplied power adaptor.
Reset	A reset button to be depressed with a pin. Depress and hold for at least 5 seconds to restore factory defaults. For further details, please refer to Section 12, Restoration of Factory Defaults.

User Manual

Pepwave AP One

LED Indicators	
PWR	OFF – Power off
	ON – Power on
RDY	RED – Device is not booted.
	AMBER – Device is not booted.
ENET	OFF – The Ethernet port is not connected.
	ON – The Ethernet port is connected.
	OFF – No client associated.
	ON – Clients are associated.
	MIN – No. of client ranges from 1-10. Each light indicates an increase of 10 clients.
	MAX – No. of client is 31 or beyond.

4.3 AP One X

Front View



Rear Panel View



User Manual

Pepwave AP One

Connectors

**Antenna
(Right-most
Connector)**

A Female N-Type connector for connecting the antenna.

WAN

A 10/100BaseT Ethernet connector, normally to be connected to back haul network.

Reset

A reset button to be depressed with a pin. Depress and hold for at least 5 seconds to restore factory defaults.

For further details, please refer to **Section 12, Restoration of Factory Defaults.**

Power Connector

Power over Ethernet 802.3af.

LED Indicators

PWR

OFF – Power off

ON – Power on

LAN

OFF – The Ethernet port is not connected.

ON – The Ethernet port is connected.

Wi-Fi

OFF – Wi-Fi is not ready.

ON – Wi-Fi is ready.

OFF – No client associated.

ON – Clients are associated.

MIN – No. of client ranges from 1-10.


Each light indicates an increase of 10 clients.

MAX – No. of client is 41 or beyond.



5 Installation

Pepwave AP One acts as a bridge between the wireless and the wired Ethernet interface. A typical setup is as follows:

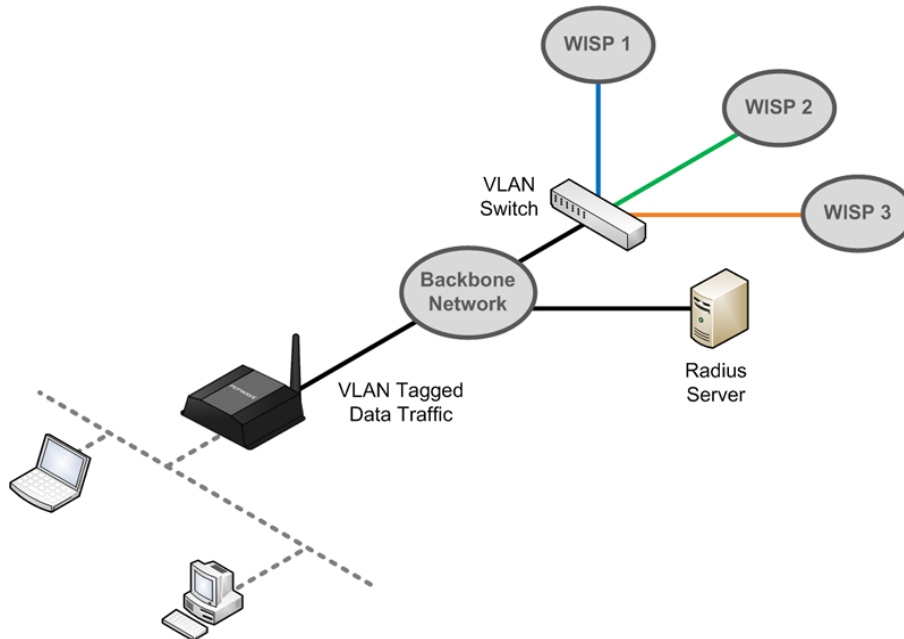

5.1 Installation Procedures

1. Attach the antenna to the Pepwave AP One unit.
2. Connect the Ethernet port on the unit with the backbone network using an Ethernet cable. The port could auto sense the cable is straight-through or cross-over.
3. Connect the power adapter to the power connector of the unit, and then plug in the power adapter.
4. Wait for the status LED to turn green.
5. Connect a PC to the backbone network, and configure the IP address of the PC to be any IP address between 192.168.0.4 and 192.168.0.254, with subnet mask of 255.255.255.0.
6. With Microsoft Internet Explorer 6 or above, or Mozilla Firefox 2.0 or above, or Google Chrome 2.0 or above, connect to the URL <https://192.168.0.3>
7. Enter the default admin login ID and password, **admin** and **public** respectively.

PEPWAVE AP One

AP Name: Pepwave AP One

Username:

Password:

Login

User Manual

Pepwave AP One

- After logging in, the following Information main page appears. Please go to **Configure > System** to facilitate further configuration of the Pepwave AP One unit.

6 Information

The screenshot shows the 'PEPWAVE AP One' web interface. On the left is a navigation menu with categories: Information (System, Wireless), Configure (System, Wireless Networks, Advanced Wireless, WDS, SNMP, Web Administration), Tools (Diagnostic Tools), Commands (Activate Changes, Firmware, Configuration, Misc), and Logout. Below the menu is a 'Real Time Status' box showing 'Controlled by: Balance (192.168.1.1)' and 'Status: Running'. The main content area is titled 'System Information' and contains a table with the following data:

System	
AP Name	Pepwave AP One
Location	Office 1
Serial Number	2830-1234-2345
Network IP Information	192.168.1.78 / 24 (Detail)
System Time	Mon May 9 17:03:46 PST 2011
Up Time	4 days, 21:25:15

Below the table, it says 'AP One (3.0.10)'.

6.1 System

System Information

System	
AP Name	Pepwave AP One
Location	Office 1
Serial Number	2830-1234-2345
Network IP Information	192.168.1.78 / 24 (Detail)
System Time	Mon May 9 17:03:46 PST 2011
Up Time	4 days, 21:25:15

System Information	
AP Name	This field shows the name of the AP One device defined in the configuration.
Location	This field shows the location of the AP One device defined in the configuration.
Network IP Information	This shows the current gateway IP of the AP One device.
System Time	This shows the system time in respect to the time zone selected.
Up Time	This shows the up time of the device since it is booted up.

Click on the **Detail** link next to the **Network IP Information** to check the following system information: *IP Address Mode, IP Address, Subnet Mask, Default Gateway, DNS Server.*

User Manual

Pepwave AP One

IP INFO		Close
IP Address Mode	Automatic	
IP Address	192.168.1.78	
Subnet Mask	255.255.255.0	
Default Gateway	192.168.1.1	
DNS Server	192.168.1.1	

6.2 Wireless

6.2.1 AP Info

Wireless Information

AP Info		Connected Clients	Nearby Networks		
Number of Wireless Networks	1				
Number of Connected Clients	0				
Current Channel	1				
Wireless Network SSID	Broadcast SSID	Security Policy	Default VLAN ID	MAC Address(BSSID)	
Pepwave_AP_One	Enable	Open - No Encryption	0	00:11:DD:AA:11:11	Info Stat

Wireless Information – AP Info

Number of Wireless Networks	This indicates the number of wireless networks.
Number of Connected Clients	This indicates the number of associated clients.
Current Channel	This shows which 802.11 channel the system is using.
Wireless Network SSID	This shows which SSID the client is associated.
Broadcast SSID	This setting shows whether or not the ESSID of this wireless network profile can be scanned by Wi-Fi clients.
Security Policy	This setting shows the wireless authentication and encryption methods.
Default VLAN ID	This setting shows the VLAN ID tagged on all outgoing packets generated from this wireless network profile.
MAC Address (BSSID)	This shows the detailed BSSIDs for that particular wireless network profile.

Click on the **Info** link to check the following wireless information: **Web Portal Login**, **Wireless Network Firewall**, **MAC Filter**, **Bandwidth Control**, **Layer 2 Isolation**.

INFO		Close
Web Portal Login	InControl	
MAC Filter	None	
Bandwidth Control	Disable	
Layer 2 Isolation	Disable	

Click on the **Stat** link to check the following networking statistics: **Packets Sent**, **Bytes Sent**, **Packets Received**, **Bytes Received**.

User Manual

Pepwave AP One

STAT		Close
Packets Sent	142	
Bytes Sent	19025	
Packets Received	0	
Bytes Received	0	

User Manual

Pepwave AP One

6.2.2 Connected Clients

Manufacturer	MAC Address	Signal	Network SSID	Authentication Status	Type	Connection Length	
Client A	00:11:aa:bb:cc:dd	Good	Pepwave Wi-Fi	Open - No Encryption (authenticated)	802.11g	associated (00:00:15)	Details

Wireless Information – Connected Clients	
Manufacturer	This shows the manufacturer based on the MAC prefix.
MAC address	This shows the client MAC address.
Signal	This shows the signal strength.
Network SSID	This shows which SSID the client is associated.
Authentication Status	This shows the client authentication method(s).
Type	This shows the radio mode of the client.
Connection Length	This shows the associated duration.

Click on the **Details** link, more networking statistics will be provided.

DETAIL		Close
Vendor	Client A	
MAC Address	00:11:aa:bb:cc:dd	
Protocol	802.11g	
IP Address	192.168.1.10	
Network SSID	Pepwave Wi-Fi	
Connection Length	associated (00:00:05)	Details
Authentication Status	Open - No Encryption (authenticated)	
Username		
Domain		
VLAN ID	0	
Network Priority Level	Gold	
Bytes Received	70185	
Bytes Sent	32421	
Packets Received	642	
Packets Sent	512	
Receive Errors	0	
Transmit Errors	0	
Duplicates Received	2	
Receive Retries	27	
Transmit Retries	74	
Transmit Excessive Retries	0	
Receive Data Rate	54M	
Transmit Data Rate	54M	
Signal (RSSI)	Excellent (58)	

User Manual

Pepwave AP One

Wireless Information – Connected Clients - Details	
Vendor	This shows the manufacturer based on the MAC prefix.
MAC Address	This shows the client MAC address.
Protocol	This shows the radio mode of the client.
IP Address	This shows the IP address of connected client.
Network SSID	This shows which SSID the client is associated.
Connection Length	This shows the associated duration.
Authentication Status	This shows the client authentication method(s).
Username	This shows the user name of the connected client.
Domain	This shows the domain name of the connected client.
VLAN ID	This shows the VLAN ID of the connected client.
Network Priority Level	This shows the priority level of internet transfers of this connect client.
Bytes Received	This shows the transmitted size this client received from the AP.
Bytes Sent	This shows the transmitted size this client sent out to the AP.
Packets Received	This shows the packet number this client received from the AP.
Packets Sent	This shows the packet number this client sent out to the AP.
Receive Errors	This shows the number of errors this client received from the AP.
Transmit Errors	This shows the number of errors this client transmitted to the AP.
Duplicates Received	This shows the number of duplicates received by the client from the AP.
Receive Retries	This shows the number of retries this client received from the AP.
Transmit Retries	This shows the number of retries this client transmitted to the AP.
Transmit Excessive Retries	This shows the number of excessive retries this client transmitted to the AP.
Receive Data Rate	This shows the receive data rate of the client from the AP.
Transmit Data Rate	This shows the transmit data rate of the client to the AP.
Signal (RSSI)	This shows the signal strength received by the client.

6.2.3 Nearby Networks

AP Info		Connected Clients		Nearby Networks			
Network Discovery	Enable						
Scanning Interval	10 s						
Scanning Time	50 ms						
Group by: None							
Manufacturer	SSID	Security	MAC Address	Channel	Signal (RSSI)	Last Seen	Status
PePWave Ltd	SSID_Home	wpa	00:1a:2b:3c:4d:5	1	Excellent (37)	14:14 07-30	down

Wireless Information – Nearby Networks	
Network Discovery	This shows if the AP would scan and discover nearby network.
Scanning Interval	This shows how often the AP goes to other channels to discover nearby AP.
Scanning Time	This shows how long the AP stays on the other channels to discover a nearby AP.
Manufacturer	This shows the manufacturer based on the MAC prefix.
SSID	This shows which SSID the client is associated.
Security	This shows the client authentication method(s).
MAC address	This shows the client MAC address.
Channel	This shows the channel of the existing Bssid.
Signal (RSSI)	This shows the signal strength.
Last Seen	This indicates the time stamp of the access point sc
Status	This shows the current status of this nearby network.

7 Configuration

7.1 System

Upon selecting **System** under **Configure** section from the navigation bar on the left, the following page shows the configuration options:

PEPWAVE AP One

Information
o System
o Wireless

Configure
o **System**
o Wireless Networks
o Advanced Wireless
o WDS
o SNMP
o Web Administration

Tools
o Diagnostic Tools

Commands
o Activate Changes
o Firmware
o Configuration
o Misc

Logout
[Real Time Status](#)
Status:
Running

System

Basic **Advanced**

AP Name	Pepwave AP One
Location	Office 1
Timezone	US/Pacific
Domain Name	
Keep Default IP	<input checked="" type="checkbox"/> Enable
IP Address Mode	Automatic

[Save](#) [Save to flash and activate](#)

AP One (3.0.10)

7.1.1 Basic

System

Basic **Advanced**

AP Name	Pepwave AP One
Location	Office 1
Timezone	US/Pacific
Domain Name	
Keep Default IP	<input checked="" type="checkbox"/> Enable
IP Address Mode	Automatic

System Settings - Basic

AP Name	A user-specified name for this access point. This value can be retrieved via SNMP.
Location	A user-specified name for the location of the access point. This value can be retrieved via SNMP.
Timezone	This option specifies the time region to be used for representing the time on the system.
Domain Name	Domain name can be set for wireless clients to have a readable name for the web management.
Keep Default IP	With this option disabled, default IP 192.168.0.3 of the device will be disabled.
IP Address Mode	The options are Automatic and Manual . Automatic: IP address of the Pepwave AP One unit is acquired from a DHCP server on the Ethernet segment. Manual: A user-specified IP address is used.

User Manual

Pepwave AP One

IP Address Mode – Manual	
Static IP Address	This specifies the unique IP address for the Pepwave AP One unit to communicate on the Ethernet segment. This IP address is distinct from the admin IP address 192.168.0.3 on the Ethernet segment.
Subnet Mask	This setting specifies the subnet mask of the Pepwave AP One unit.
Default Gateway	This setting specifies the default gateway of the Pepwave AP One unit.
DNS Server	This is the DNS server address to be used by the Pepwave AP One unit for resolving host names.
IP Address Mode – PPPoE	
PPPoE Username	This specifies the username required in order to connect via PPPoE to acquire Internet connectivity. The information is typically determined by and can be obtained from the ISP.
PPPoE Password	This specifies the password required in order to connect via PPPoE to acquire Internet connectivity. The information is typically determined by and can be obtained from the ISP.
PPPoE Service Name	This is a PPPoE parameter which is provided by the ISP. Note: Leave this field empty if you are not sure.

User Manual

Pepwave AP One

7.1.2 Advanced

The screenshot shows the configuration interface for the Pepwave AP One, specifically the Advanced tab. The following settings are visible:

- Management VLAN ID:** 0
- NTP Server:** pool.ntp.org
- Scheduled Reboot:** Enable. Schedule: Weekly, Day: Sunday, Time: 00:00.
- Ethernet Speed/Duplex:** auto
- AP Mode:** Bridge (dropdown menu also shows Bridge and Router)

Buttons at the bottom: Save, Save to flash and activate

System Settings - Advanced

Management VLAN ID	This specifies the VLAN from which management sessions are allowed. The establishment of management sessions is restricted only to the specified VLAN ID. If Management VLAN ID is set to zero, no VLAN restriction is applied. The default value of this setting is zero . It means no tagging is enabled (instead of tagged with zero).
NTP Server	This is the Network Time Protocol (NTP) Server hostname to be used for synchronizing system clock of Pepwave AP One. The default value of this setting is pool.ntp.org .
Scheduled Reboot	The system would perform reboot based on the scheduled time set. Click the box above the Schedule to Enable this feature.
Ethernet Speed/Duplex	This setting provides the option to set the speed of the Ethernet.
Controller IP Address / Domain Name	This is an optional field which specifies the IP address or domain name of the Peplink Balance AP Controller.
AP Mode	Available options are Bridge and Router . With this option set as Router, the following Manual Router Settings will be available.

User Manual

Pepwave AP One

7.1.3 Manual Router Settings

Manual Router Settings will only be available when the AP Mode in the previous section had been selected as **Router** mode. You can use the AP One as a DHCP server for other devices behind.

Manual Router Settings

LAN IP	192.168.1.1
LAN Subnet Mask	255.255.255.0
DHCP Server	<input checked="" type="checkbox"/> Enabled
IP Start Range	192.168.1.100
IP Stop Range	192.168.1.200
Subnet Mask	255.255.255.0
Broadcast Address	192.168.1.255
Gateway	192.168.1.1
DNS 1	192.168.1.1
DNS 2	
DNS 3	
Lease Time	3600 seconds

DHCP Server Parameters

LAN IP	This setting specifies the DHCP server IP address.
LAN Subnet Mask	This setting specifies the subnet mask of the DHCP server.
DHCP Server	Checked the box to enable the DHCP Server of this device. Following options will be enabled once you have checked and enabled the service.
IP Start Range	This setting specifies the first address in the range of IP addresses to be assigned to DHCP clients.
IP Stop Range	This setting specifies the last address in the range of IP addresses to be assigned to DHCP clients.
Subnet Mask	This setting specifies the subnet mask to be used by DHCP clients.
Broadcast Address	This setting specifies the broadcast address to be used by DHCP clients.
Gateway	This setting specifies the default routing gateway to be used by DHCP clients.
DNS 1	This setting specifies the IP address of the primary DNS Server to be offered to DHCP clients.
DNS 2	This setting specifies the IP address of the secondary DNS Server to be offered to DHCP clients.
DNS 3	This setting specifies the IP address of the tertiary DNS Server to be offered to DHCP clients.
Lease Time	This setting specifies the length of time throughout which an IP address of a DHCP client remains valid. Upon expiration of the Lease Time, the assigned IP address will no longer be valid and the renewal of the IP address assignment will be required.

7.2 Wireless Networks

Upon selecting **Wireless Networks** under Configure section from the navigation bar on the left, the following shows the configured SSID available on the system:

Wireless Networks

Wireless Network SSID	Security Policy	Default VLAN ID	Status	MAC Address (BSSID)	Portal	
Pepwave_AP_One	Open - No Encryption	0	Enable	00:1A:DD:A8:74:A1	Disable	Edit Delete Info

[Add](#)

PEPWAVE_74A0	
Broadcast SSID	Enable
MAC Filter	None
Bandwidth Control	Disable
Layer 2 Isolation	Disable

AP One (3.0.10)

General Wireless Networks Settings

Wireless Network SSID	The SSID of the virtual Access Point (AP).
Security Policy	Shows the configured wireless authentication and encryption methods.
Default VLAN ID	This setting specifies the VLAN ID to be tagged on all outgoing packets generated from the virtual AP (i.e. packets that travel from the Wi-Fi segment, through the Pepwave AP One unit to Ethernet segment via the LAN port). If 802.1x is enabled, a per-user VLAN ID can be specified in the authentication reply from the Radius server. If it is set, the value specified via Default VLAN ID will be overridden.
Status	Shows whether the virtual AP is enabled or disabled.
MAC Address (BSSID)	Shows the detailed BSSIDs.
Portal	Shows if the InControl Guest Portal is enabled. Please refer to section 7.2.2 for details.


Click on the **Info** link to check the following networking statistics: **Broadcast SSID**, **MAC Filter**, **Bandwidth Control**, **Layer 2 Isolation**.

General Wireless Networks Settings – Info

Broadcast SSID	This shows if the Broadcast SSID feature of this network is enabled.
MAC Filter	This shows if the MAC Filter feature of this network is enabled.
Bandwidth Control	This shows if the Bandwidth Control feature of this network is enabled.
Layer 2 Isolation	This shows if the Layer 2 Isolation feature of this network is enabled.

To add a new virtual AP, click the **Add** button. To modify the settings for a virtual AP, click the link **Edit** on the right of the desired WLAN SSID, upon which the following **Wireless Network Details** is displayed.

7.2.1 Wireless Network Details - Basic

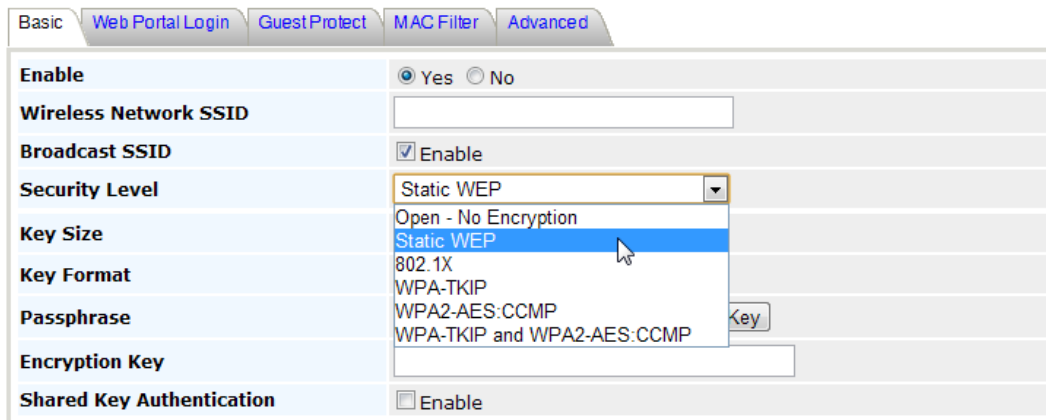

The screenshot shows the configuration interface for the Wireless Network Details - Basic. The 'Security Level' dropdown menu is open, displaying the following options: 'Open - No Encryption', 'Static WEP' (which is highlighted), '802.1X', 'WPA-TKIP', 'WPA2-AES:CCMP', and 'WPA-TKIP and WPA2-AES:CCMP'. Other visible settings include 'Enable' (radio buttons for Yes and No, with Yes selected), 'Wireless Network SSID' (text input), 'Broadcast SSID' (checkbox checked), 'Key Size' (text input), 'Key Format' (text input), 'Passphrase' (text input), 'Encryption Key' (text input), and 'Shared Key Authentication' (checkbox unchecked).

Wireless Networks Details - Basic	
Enable	Select Yes to enable the virtual AP, or No to disable the virtual AP. By default, the virtual AP is enabled .
Wireless Network SSID	This setting specifies the SSID of the virtual AP to be scanned by Wi-Fi clients.
Broadcast SSID	This setting specifies whether or not the ESSID of the virtual AP can be scanned by Wi-Fi clients. Note that the BSSID (i.e. the MAC address of the virtual AP) cannot be hidden from the scan. To associate with the virtual AP, clients must specify the correct ESSID upon association. Broadcast SSID is enabled by default.
Security Level	This setting configures the wireless authentication and encryption methods. Available options are: Open - No Encryption , Static WEP , 802.1X , WPA-TKIP and WPA2-AES:CCMP . Selecting Open - No Encryption disables encryption. For details on the other options, please refer to: 7.2.1.1 - Static WEP Parameters 7.2.1.2 - 802.1x Parameters 7.2.1.3 - WPA Parameters

User Manual

Pepwave AP One

7.2.1.1 Static WEP

The configuration of Static WEP parameters enables pre-shared WEP key encryption. Authentication is not supported by this method.

The security level of this method is known to be weak.

Static WEP parameters are entered via the following screen upon selection:

Security Level	Static WEP
Key Size	40 bits (64-bit WEP)
Key Format	ASCII
Passphrase	<input type="text"/> <input type="button" value="Generate Key"/>
Encryption Key	<input type="text"/>
Shared Key Authentication	<input type="checkbox"/> Enable

Static WEP Parameters	
Key Size	The setting can be configured as either 40 bits (64-bit WEP) or 104 bits (128-bit WEP) . (For WDS setting, 128 bits will also be available.)
Key Format	The setting can be configured as either ASCII or HEX . <ul style="list-style-type: none">• ASCII will be applied to encryption keys that are manually entered only.• HEX will be applied to encryption keys that are either manually entered or automatically generated.
Passphrase	Combination of words and characters used to generate an encryption key. Click Generate Key to create the key.
Encryption Key	This setting specifies a user-specified encryption key value. For ASCII format, key length is either 5 or 13 . For HEX format, key length is either 10 or 26 .
Shared Key Authentication	This setting enables the use of shared key authentication. Open authentication is the default authentication.

User Manual

Pepwave AP One

7.2.1.2 802.1X Parameters

The configuration of 802.1X parameters enables Radius-based 802.1X authentication with a dynamic WEP key. Once selected, Radius Server Setting will be available.

The configuration screen is as follows:

Security Level	802.1X
802.1X Version	<input type="radio"/> v1 <input checked="" type="radio"/> v2
WEP Key Size	40 bits (64-bit WEP)
Re-keying Period	0 seconds (0: Disable)

802.1x Parameters	
802.1X Version	<p>This setting selects between v1 or v2 of the 802.1x EAPOL.</p> <p>When v1 is selected, both v1 and v2 clients can associate with the access point. However, when v2 is selected, only v2 clients can associate with the access point.</p> <p>Most modern wireless clients support v2. In the event that there are stations that do not support v2, select the option v1.</p> <p>By default, the value of the setting is v2.</p>
WEP Key Size	<p>The setting can be configured as either 40 bits or 104 bits.</p>
Re-keying Period	<p>This setting specifies the length of time throughout which the broadcast key remains valid. Upon expiration of Re-keying Period, the broadcast key will no longer be valid and the renewal of the broadcast key will be required.</p> <p>The default is 14400 seconds (i.e. 4 hours).</p> <p>A value of 0 disables re-keying.</p>

User Manual

Pepwave AP One

7.2.1.3 WPA parameters

The configuration of WPA parameters enables **WPA-TKIP**, **WPA2-AES:CCMP** and **WPA-TKIP and WPA2-AES:CCMP**.

To enable WPA and WPA-PSK, configure WPA-TKIP. To enable WPA2 and WPA2-PSK, configure WPA2-AES.

When WPA or WPA2 is configured, Radius-based 802.1x authentication with TKIP encryption method is enabled. Under this configuration, the **Pre-Shared Key** option should be disabled.

The security level of this method is known to be very high.

Security Level	WPA-TKIP
Pre-Shared Key	<input checked="" type="checkbox"/> Enable
Passphrase	<input type="text"/> Hide / Show Passphrase

When WPA-PSK or WPA2-PSK is configured, a **Pre-Shared Key**, or **Passphrase**, is used for data encryption and authentication. Under this configuration, the Pre-Shared Key option should be enabled. Key length must be between 8 and 63 characters (inclusive).

The security level of this method is known to be high.

User Manual

Pepwave AP One

7.2.1.4 Radius Server Settings

Primary Host	<input type="text"/>	
Secret	<input type="text"/>	
Authentication Port	<input type="text"/>	Default AuthPort
Accounting Port	<input type="text"/>	Default AcctPort
Secondary Host	<input type="text"/>	
Secret	<input type="text"/>	
Authentication Port	<input type="text"/>	Default AuthPort
Accounting Port	<input type="text"/>	Default AcctPort
Maximum Retransmission	<input type="text" value="3"/>	
Radius Request Interval	<input type="text" value="3"/>	s (initial value, double upon every retransmission)

Radius Server Settings	
Primary Host	When 802.1x authentication is configured, the Radius server specified by this setting will be used for authentication and accounting.
Secret	This is the secret for accessing the Radius server.
Authentication Port	This specifies the UDP port number for the Authentication port of the Radius server.
Accounting Port	This specifies the UDP port number for the Accounting port of the Radius server.
Secondary Host	This setting specifies the Radius server to used for authentication and accounting in the event that the host specified by Primary Host is unavailable.
Maximum Retransmission	This specifies the maximum number of retry for RADIUS authentication. By default, it is set as 3 .
Radius Request Interval	This specifies the time interval in second between each RADISU request attempt. Note that the request time interval would be doubled every retransmission. By default, it is set as 3s .

User Manual

Pepwave AP One

7.2.2 Web Portal Login

Basic Web Portal Login Guest Protect MAC Filter Advanced

Enabling the InControl Web Portal will allow you to generate unique login accounts for your guests. This allows you to provide guest wi-fi access with a simple way to track and manage users.

Setup a Free InControl account now at <http://incontrol.pepwave.com> to start using this feature.


Simply registering the devices with Pepwave InControl, users can apply configurations, firmware, and monitor network activity remotely through this centralized management system. For more details, you can refer to Pepwave website at: <http://www.pepwave.com/products/incontrol/>.

Tip: How to Set Up AP One Guest Portal in InControl


To set up Guest Portal, you need to (1) enable guest portal function and (2) create guest accounts and set up portal page.

Step One: Enable Guest Portal

1. Log in [InControl](https://incontrol.pepwave.com/) using your username and password. <<https://incontrol.pepwave.com/>>
2. Click "Configuration" tab and find the desired configuration profile.

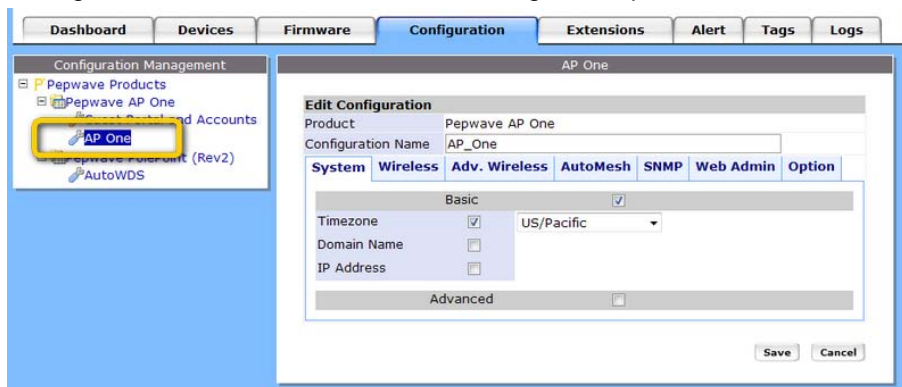

3. To find your wireless network, click "Wireless" tab, check the box next to "Wireless Networks" and click "More..." button.

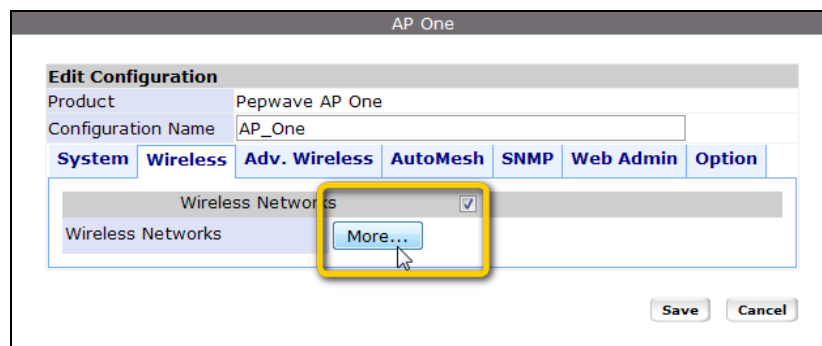


4. Click on the name of the SSID you have set up.


User Manual

Pepwave AP One


(Note: If you have not added a wireless network, you can click "New wireless network..." to set up a new one.)

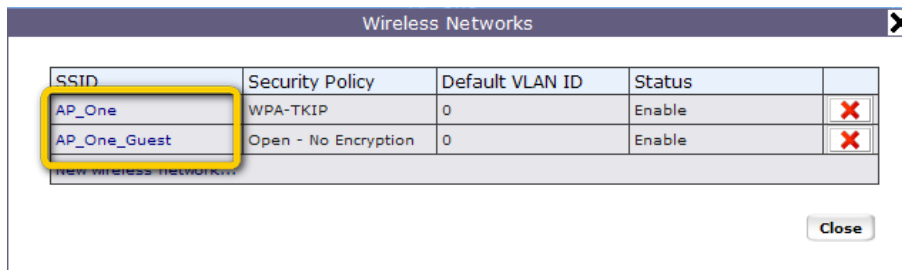

5. On the "Edit a wireless network" screen, click "Web Portal Login" tab. Click "Enable" to enable the Web Portal Login function. Click "OK" to continue.

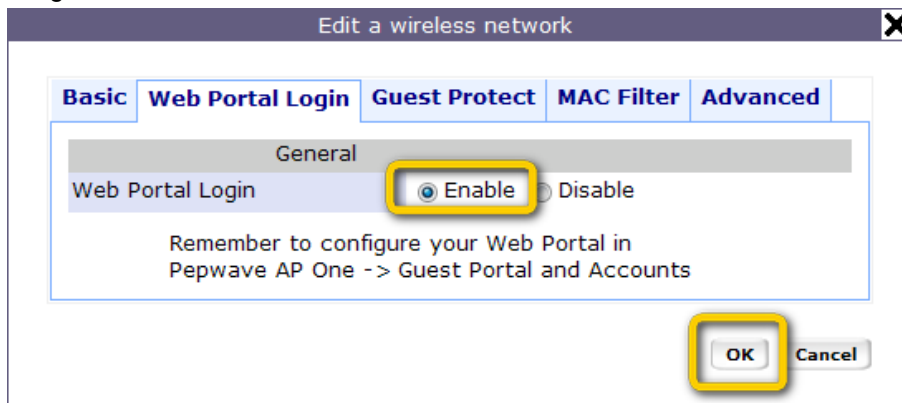

6. Click "Save" button to save the changes.

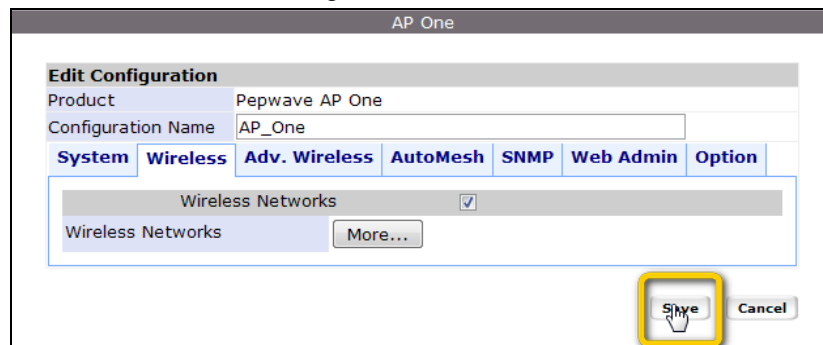


7. Click the "Web Admin" tag, and setup the web access as follows:

User Manual

Pepwave AP One

Web Access Protocol: HTTPS
Management Port: 443
HTTP to HTTPS Redirection: Enable

Click Save button to save the settings.

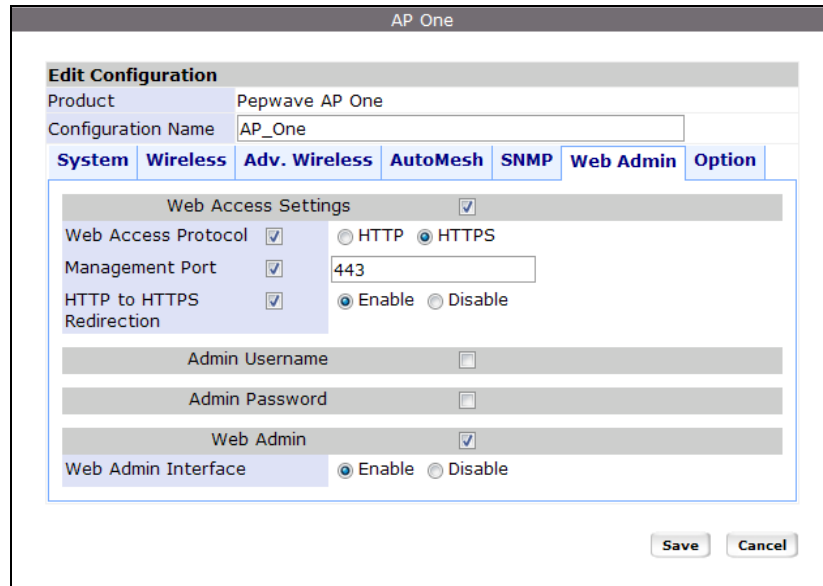

The screenshot shows the 'Edit Configuration' page for a Pepwave AP One. The 'Web Admin' tab is selected. Under 'Web Access Settings', the following options are visible:

- Web Access Protocol: HTTP, HTTPS
- Management Port: 443
- HTTP to HTTPS Redirection: Enable, Disable
- Admin Username:
- Admin Password:
- Web Admin:
- Web Admin Interface: Enable, Disable

Buttons for 'Save' and 'Cancel' are located at the bottom right of the configuration area.

Step Two: Create Guest Accounts and Set Up Portal Page

8. Go to "Guest Portal and Accounts" by clicking on the link at the left panel.



The screenshot shows the 'Guest Account Management of Pepwave AP One' page. The 'Configuration' tab is active. The left sidebar shows 'Guest Portal and Accounts' highlighted. The main content area has two tabs: 'Guest Accounts' and 'Portal Page Customization'. The 'Unused Guest Accounts' section shows a table with columns for Name, Password, and Time Quota Generation Date, and a 'Delete selected' button. The 'Generates Accounts' section has the following fields:

- No. of accounts to be generated:
- Username prefix (non-empty):
- Sequence number suffix starts from:
- Time Quota: : (HHH:MM)

9. You can generate more than one account at one time. Change the parameters in the fields No. of accounts to be generated, Username prefix, Sequence number suffix and Time Quota. Default time limit is set to 24 hours. You can change the time limit.

10. Click "Generate" button.

11. You should now have some guest accounts generated as shown in the table "Unused Guest Accounts". You can download the accounts information in CSV file by clicking the "All", "Generated today" or "Not generated today" links.

User Manual

Pepwave AP One

The screenshot shows the 'Guest Account Management of Pepwave AP One' interface. It has two tabs: 'Guest Accounts' and 'Portal Page Customization'. The 'Unused Guest Accounts' section contains a table with the following data:

<input type="checkbox"/>	Name	Password	Time Quota	Generation Date
<input type="checkbox"/>	guest1	43205879	24 hours	2010/11/18
<input type="checkbox"/>	guest2	87649251	24 hours	2010/11/18
<input type="checkbox"/>	guest3	82134069	24 hours	2010/11/18
<input type="checkbox"/>	guest4	51723608	24 hours	2010/11/18
<input type="checkbox"/>	guest5	81340569	24 hours	2010/11/18

Below the table, it says 'Total: 5' and 'CSV download: All | Generated today | Not generated today'. There is a 'Delete selected' button. The 'Generates Accounts' section has the following fields:

- No. of accounts to be generated:
- Username prefix (non-empty):
- Sequence number suffix starts from:
- Time Quota: : (HHH:MM)

12. A standard portal page will be generated automatically after guest accounts are generated (<http://guest.pepwave.com>). You can customize the portal page by clicking on the "Portal Page Customization" tab. In the screen upload your logo image and enter message for guests. You can preview your portal page and then publish the portal page.

The screenshot shows the 'Guest Account Management of Pepwave AP One' interface with the 'Portal Page Customization' tab selected. The 'Update Portal Page Information' section has the following fields:

- Logo Image:
Note: Max size: 2 MB. Supported image types: JPEG, PNG and GIF.
- Message:

At the bottom, there are 'Preview' and 'Publish' buttons.

Your guest accounts and portal page are now ready for use.

7.2.3 Guest Protect

The screenshot shows the configuration page for Guest Protect. It includes sections for:

- Block LAN Access:** Includes checkboxes for 'Block all private IPs', 'Custom Subnet', and 'Block Exception'. There is an 'Enable' checkbox and a list of subnets with a 'Delete highlighted' button and an '<<< Add to list' button.
- Bandwidth Management:** Includes an 'Enable' checkbox and radio buttons for 'Per VAP' and 'Per Client'.
- Upstream Limit:** A text input field set to '0' with 'kbps (0: Unlimited)' next to it.
- Downstream Limit:** A text input field set to '0' with 'kbps (0: Unlimited)' next to it.
- Maximum Number of Clients:** A text input field set to '0' with '(0: unlimited)' next to it.
- Firewall Mode:** Radio buttons for 'Lockdown - Block all traffic except for the following exceptions:', 'Flexible - Allow all traffic except for the following exceptions:', and 'Disable' (which is selected).
- Exceptions:** A table with columns 'Name', 'Type', and 'Item'. It currently shows 'No Active Exceptions'.

Wireless Networks Details - Guest Protect

Block LAN Access

This option enables the settings to **Block all private IPs / Custom Subnet / Block Exception**.

If you have selected **Block all private IPs** or **Custom Subnet**, these IPs / Subnets will be blocked no matter what "Firewall Mode" selected. When Block Exception is selected, IPs entered will be excluded from the blocking list.

1. **Private IP** -- This includes the commonly known private IPs:
 - 192.168.0.0 - 192.168.255.255
 - 172.16.0.0 - 172.31.255.255
 - 10.0.0.0 - 10.255.255.255
2. **Custom Subnet** -- This includes user specified IP subnets to be blocked.
3. **Block Exception** – Only IPs specified will NOT be blocked.

Bandwidth Management

This option enables the settings to control upstream and downstream limits. You can select to either control the bandwidth usage **Per VAP** or **Per Client**.

Maximum Number of Clients

This setting specifies the maximum number of clients that can be connected to the AP One simultaneously. By default, it is set to **0: unlimited**.

Firewall Mode

This setting specifies three options: **Lockdown**, **Flexible**, and **Disable**.

- **Lockdown** – Block all traffic except for the pre-defined exceptions;
- **Flexible** – Allow all traffic except for the pre-defined exceptions;
- **Disable** – Firewall mode is disabled. (Default option)

Exceptions


This setting specifies the exceptions when **Lockdown** or **Flexible** Firewall Mode is selected. Exceptions can be added by types, including *Port*, *Domain*, *IP Address*, *MAC Address*, *Application/Service*.

User Manual


Pepwave AP One

7.2.4 MAC Filter

The settings allow administrator to control the access through Mac address filtering. Available options are: **None**, **Deny all except listed**, **Accept all except listed**.

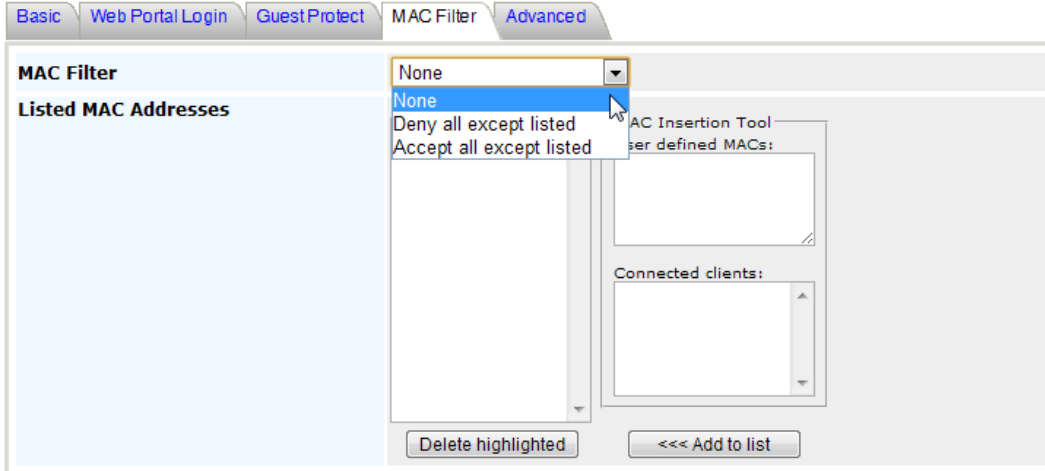

7.2.5 Advanced

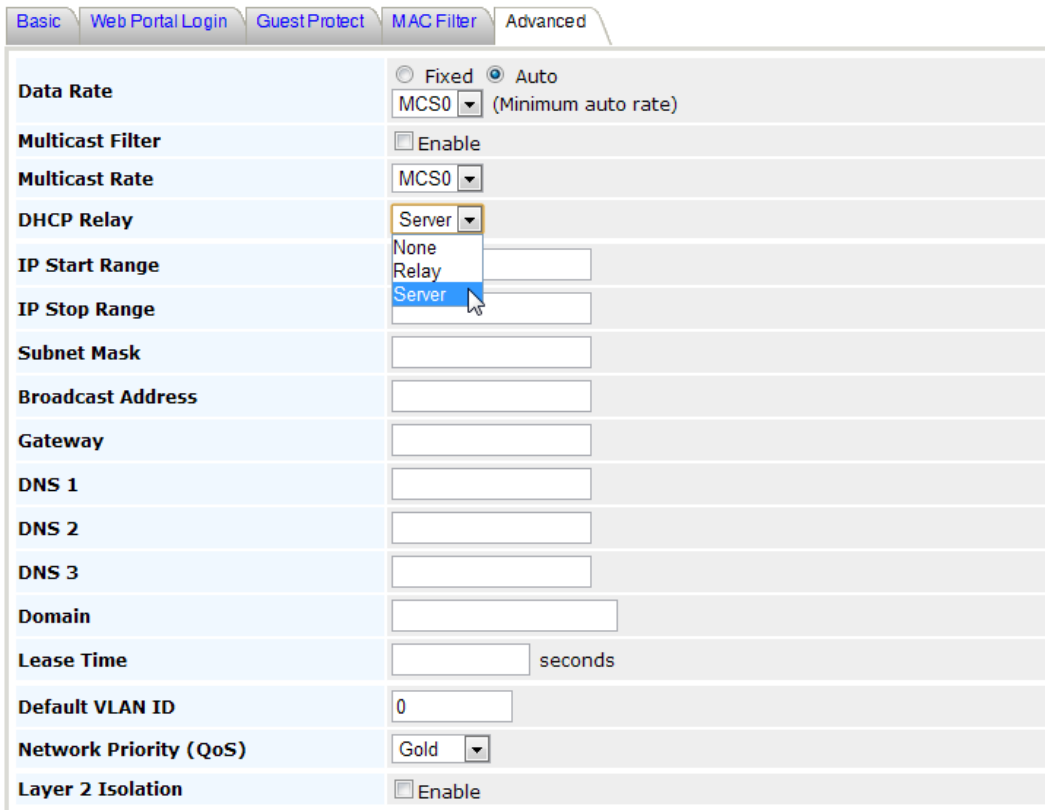

User Manual

Pepwave AP One

Wireless Networks Details -Advanced	
Data Rate	<p>There are two options on data rate: Fixed, Auto</p> <p>Fixed will forced all data packets to be transmitted into the selected transmit rate. Auto will automatically select the best transmit rate with a condition to use the selected transmit rate as the minimum auto transmit rate.</p> <p>The rate options and values will be affected by selected Protocol and Channel Bonding in section 7.3.1.</p>
Multicast Filter	<p>This setting enables the filtering of multicast network traffic to the wireless SSID.</p>
Multicast Rate	<p>This setting specifies the transmit rate to used for sending multicast network traffic.</p> <p>The rate options and values will be affected by selected Protocol and Channel Bonding in section 7.3.1.</p>
DHCP Relay	<p>The AP One will forward DHCP requests to a specified DHCP Server. This option prevents broadcast messages from being propagated on the Ethernet segment. Upon selecting this option, the DHCP Server IP address (or DHCP Server settings) will be prompted.</p>
Default VLAN ID	<p>This setting specifies the VLAN ID to be tagged on all outgoing packets generated from the virtual AP (i.e. packets that travel from the Wi-Fi segment, through the Pepwave AP One unit to Ethernet segment via the LAN port).</p> <p>If 802.1x is enabled and a per-user VLAN ID is specified in the <i>authentication reply from the Radius server</i>, then the value specified via Default VLAN ID will be overridden.</p> <p>The default value of this setting is 0. That means VLAN tagging is disabled (instead of tagged with zero).</p>
Network Priority (QoS)	<p>The 802.1p QoS value to be marked on all outgoing packets generated from the virtual AP (i.e. packets that travel from the Wi-Fi segment, through the Pepwave AP One unit to Ethernet segment via the LAN port).</p> <p>Possible values are Gold, Silver and Bronze.</p>
Layer 2 Isolation	<p>Layer 2 is in reference to the second layer in the ISO Open System Interconnect model.</p> <p>When this option is enabled, clients on the same VLAN, SSID or subnet are not allowed to communicate directly via the Layer 2 Protocol(s). Traffic is passed to upper communication layer(s).</p> <p>With this option disabled, clients on the same VLAN are allowed to communicate with each other directly. (Windows network resources browsing will be possible.)</p> <p>By default, the setting is disabled.</p>

7.3 Advanced Wireless Settings

Advanced Wireless Settings provides more options to fine tune the parameters on the system to achieve the optimal performance.

7.3.1 Radio Settings

Advanced Wireless Settings

Radio Settings	Advanced Features	Performance Tuning	
Protocol	802.11bgn		
Operating Country	Default (US)		
Channel Bonding	20 MHz		
Channel	1 (2.412 GHz)		
	Schedule Scan	Day	Time
	Weekly	Sunday	00:00
Power Boost	<input type="checkbox"/> Enable		
Tx Output Power	Low		

Radio Settings

Protocol	<p>Five options are available:</p> <p>802.11bgn: Pepwave AP One accepts 802.11b, 802.11g and 802.11n client association requests.</p> <p>802.11b/g: Pepwave AP One accepts both 802.11b and 802.11g client association requests.</p> <p>802.11b Only: Pepwave AP One accepts only 802.11b client association requests.</p> <p>802.11g Only: Pepwave AP One accepts only 802.11g client association requests.</p> <p>802.11n Only: Pepwave AP One accepts only 802.11n client association requests.</p>
Operating Country	<p>This setting specifies the country / region regulations which Pepwave AP One unit should follow.</p> <p>If North America region is selected, RF channels 1 to 11 are available. Maximum transmission power is 26 dBm (400 mW).</p> <p>If Europe region is selected, RF channels 1 to 13 are available. Maximum transmission power is 20 dBm (100 mW).</p> <p>Note: User is required to select the appropriate option based on their local laws and regulations.</p>
Channel Bonding	<p>This option will only be available when the above Protocol is set as 802.11bgn or 802.11n Only. The three options are 20MHz, 20/40MHz and 40MHz.</p>
Channel	<p>This option selects the 802.11 channel to be utilized. Available options are from 1 to 11, and from 1 to 13 for the country setting of North America region and Europe region, respectively. (Channel 14 is only available when the country is selected as Japan with protocol 802.11b.)</p> <p>If Auto is set, the system would perform channel scanning based on the scheduled time set and choose the most suitable channel automatically.</p>
Power Boost	<p>This option enables the power boost feature, which maximum the Wi-Fi capacity of the device. Please enable only if the local regulation allow to do so.</p>
Tx Output Power	<p>This option enables the configuration of transmission power.</p> <p>Available options are Max, High, Medium, and Low.</p>

7.3.2 Advanced Features

Radio Settings	Advanced Features	Performance Tuning
Discover Nearby Networks	<input type="checkbox"/>	Enable
Scanning Interval	10	s
Scanning Time	50	ms
WMM	<input checked="" type="checkbox"/>	Enable

Advanced Wireless Settings – Advanced Features	
Discover Nearby Network	The AP would scan and discover nearby network if this option is enabled.
Scanning Interval	This setting determines how often the access point goes to other channels to discover Neighbor AP.
Scanning Time	This setting determines how long the access point stays on the other channels to discover Neighbor AP.
WMM	This option enables the Wi-Fi Multimedia (WMM), as known as Wireless Multimedia Extensions (WME) on the access point. It is always on by default.

7.3.3 Performance Tuning

Radio Settings	Advanced Features	Performance Tuning
Beacon Rate	1Mbps	
Beacon Interval	100ms	
DTIM	1	
RTS Threshold	0	
Distance / Time Convertor	4050 m (input distance for recommended values)	
Slot Time	9	µs <input type="button" value="Default"/>
ACK Timeout	48	µs <input type="button" value="Default"/>
CTS Timeout	48	µs <input type="button" value="Default"/>
802.11g Protection	<input checked="" type="checkbox"/> Enable (In favor of 802.11g devices in mixed mode (11g and 11b) networks)	

Advanced Wireless Settings – Performance Tuning

Beacon Rate	This setting provides the option to send beacon in different transmit bit rate and the bit rates are: 1Mbps, 2Mbps, 5.5Mbps, 6Mbps, 11Mbps.
Beacon Interval	This setting provides the option to set the time between each beacon send. Available options are: 100ms, 250ms and 500ms.
DTIM Period	This setting provides the option to set the frequency for beacon to include Delivery Traffic Indication Message, DTIM. The interval unit is in millisecond.
RTS Threshold	This setting provides the option to set the minimum packet size for the unit to send an RTS using the RTS/CTS handshake. Setting zero would disable this feature.
Distance / Time Convertor	This is a convertor which will automatically adjust and recommend the Slot Time, ACK Timeout and CTS Timeout based on the distance you have entered.
Slot Time	This setting provides the option to modify the unit wait time before it transmits. The default value is 9µs.
ACK Timeout	This setting provides the option to set the wait time to receive acknowledgement packet before doing retransmission. The default value is 48µs.
CTS Timeout	This setting provides the option to specify the timeout for the unit to wait for CTS response in the RTS/CTS handshake. The default value is 48µs. This option will be disabled if you have chosen to use protocol 802.11bgn or 802.11n Only.
802.11g Protection	Enable this setting to in favor of 802.11g devices in mixed mode (11g and 11b) networks. This option will be disabled if you have chosen to use protocol 802.11bgn or 802.11n Only.
Frame Aggregation	This option is only available when protocol 802.11bgn or 802.11n Only is selected. Once selected, the feature Frame Aggregation will be enabled.
Aggregation Length	This option will be available when Frame Aggregation in the above is enabled, which will specify the length of aggregation data frames.

User Manual

Pepwave AP One

7.4 WDS

Wireless Distributed System - WDS provides a way to link APs together when wired cabling is not preferable. This also extends the wireless coverage of the wireless network for the wireless clients.

WDS				
Name	Pepwave AP One			
MAC Address	00:11:DD:AA:11:11			
Manufacturer	MAC Address	Status	Encryption	
Pepwave	00:11:AA:22:33:AA	Disable	Open - No Encryption	Edit Delete Info

Click **Add** to add and configure a new WDS peer connection.

WDS Settings	
Enable	This option enables this entry.
MAC Address	This setting gives the MAC address of the other AP to form a WDS link.
Security Policy	For more details, please refer to section 7.2.1.

7.5 SNMP

7.5.1 SNMP Settings

Upon selecting **SNMP** from the navigation bar on the left-hand-side of the Main Menu, the following page is displayed to enable the configuration of SNMP server settings:

SNMP

SNMP Settings	
Server Name	AP One
SNMPv1	<input checked="" type="checkbox"/> Enable
SNMPv2	<input checked="" type="checkbox"/> Enable
SNMPv3	<input checked="" type="checkbox"/> Enable
SNMP Trap	<input checked="" type="checkbox"/> Enable
SNMP Trap Receiver Name	
SNMP Trap IP Address	
<input type="button" value="Save"/> <input type="button" value="Save to flash and activate"/>	

SNMP Settings	
Server Name	This setting specifies the name that identifies the SNMP server.
SNMPv1	This setting specifies whether to enable or disable the support for Version 1 of SNMP.
SNMPv2	This setting specifies whether to enable or disable the support for Version 2 of SNMP.
SNMPv3	This setting specifies whether to enable or disable the support for Version 3 of SNMP.
SNMP Trap	SNMP Trap is a message initiated from a client and sent to the AP One device. Once this option is enabled, the following two options for SNMP Trap will be available for configuration.
SNMP Trap Receiver Name	This setting specifies the name that identifies the SNMP Trap Receiver.
SNMP Trap IP Address	This setting specifies the IP address of the SNMP Trap Receiver.

7.5.2 SNMPv1 / SNMPv2 Communities

Community Name	IP Address	IP Mask	Access Mode	Status	
internal	10.10.10.1	255.255.255.0	Read & Write	Enable	Edit Remove
office	210.10.10.1	255.0.0.0	Read Only	Disable	Edit Remove

[New](#)

By adding SNMPv1/v2 Communities, access rights can be controlled. Click on the **New** button to add one.

SNMPv1/v2 Community

Settings	
Community Name	<input type="text" value="internal"/>
IP Address	<input type="text" value="10.10.10.1"/>
IP Mask	<input type="text" value="255.255.255.0"/>
Access Mode	<input type="text" value="Read & Write"/>
Status	<input checked="" type="radio"/> Enable <input type="radio"/> Disable

[Save](#) [Save to flash and activate](#)

SNMPv1 / SNMPv2 Communities	
Community Name	The password for getting or setting SNMP values.
IP Address and IP Mask	The allowed IP and subnet address which can access the SNMP server.
Access Mode	Choose either Read Only or Read & Write .
Status	Enable or Disable this community.

User Manual

Pepwave AP One

7.5.3 SNMPv3 Users

User Name	Authentication Protocol	Privacy Protocol	Access Mode	Status	
user1	HMAC-SHA	CBC-DES	Read Only	Enable	Edit Remove
user2	HMAC-MD5	None	Read & Write	Disable	Edit Remove

[New](#)

By adding SNMPv3 users, access rights can be controlled. Click on the **New** button to add one.

SNMPv3 User

Settings

SNMPv3 User Name	<input type="text" value="user2"/>
Authentication Protocol	HMAC-MD5
Authentication Password	<input type="password" value="••••••"/> <input type="password" value="••••••"/> (Retype)
Privacy Protocol	None
Access Mode	Read & Write
Status	<input type="radio"/> Enable <input checked="" type="radio"/> Disable

[Save](#) [Save to flash and activate](#)

SNMPv3 User Setting	
SNMPv3 User Name	The user ID to be allowed to access the SNMP agent.
Authentication Protocol	The protocol for authenticating the user. Available options are: HMAC-MD5 and HMAC-SHA .
Authentication Password	Users provided with a correct password will be granted the right to access the SNMP agent.
Privacy Protocol	The encryption method to be used in SNMPv3 communication. Available options are: None and CBC-DES .
Privacy Password	This option is shown only if CBC-DES is chosen as the Privacy Protocol. This is the key for decrypting the encrypted data.
Access Mode	Grant Read or Read & Write access to this user.
Status	Enable or Disable this user.

7.6 Web Administration

Upon selecting **Web Administration** from the navigation bar on the left-hand-side of the Main Menu, the tabs of configuring the management interface are displayed.

7.6.1 Web Access Settings

Web Administration

Web Access Settings	Admin Username	Admin Password	Web Administration
Web Access Protocol	<input type="radio"/> HTTP <input checked="" type="radio"/> HTTPS		
Management Port	443		
HTTP to HTTPS Redirection	<input checked="" type="checkbox"/> Enable		
<input type="button" value="Save"/> <input type="button" value="Save to flash and activate"/>			

The selection **Web Access Settings** configures the protocol and TCP port number of the web server. If **HTTPS** is enabled, **HTTP to HTTPS Redirection** option will be provided.

7.6.2 Admin Username

Web Access Settings	Admin Username	Admin Password	Web Administration
New Admin Username	newadminuser		
<input type="button" value="Save"/> <input type="button" value="Save to flash and activate"/>			


The selection **Admin Username** configures the administrator username for entering Web Admin Interface. To change to the Username, enter the new username into the **Username** input fields.

7.6.3 Admin Password

Web Access Settings	Admin Username	Admin Password	Web Administration
New Password (confirmation)		
<input type="button" value="Save"/> <input type="button" value="Save to flash and activate"/>			

The selection **Admin Password** configures the administrator password for entering Web Admin Interface. To change to the password, enter the same new password into the **New Password** and **New Password (Retype)** input fields.

7.6.4 Web Administration

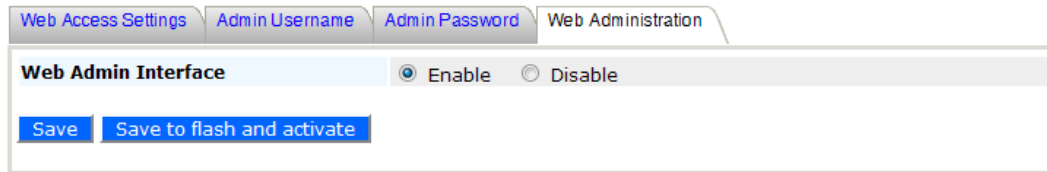


The screenshot shows a web interface with four tabs: "Web Access Settings", "Admin Username", "Admin Password", and "Web Administration". The "Web Administration" tab is active. Below the tabs, there is a section titled "Web Admin Interface" with two radio buttons: "Enable" (which is selected) and "Disable". At the bottom of the section, there are two buttons: "Save" and "Save to flash and activate".

The selection **Disable Web Administration** turns off the access to Web Administration Interface. After being turned off, Web Administration Interface can be re-enabled using SNMP.


8 Tools - Diagnostic Tools

This provides three useful tools for diagnosing the network. The three available options are: **Ping**, **Traceroute** and **Nslookup**.

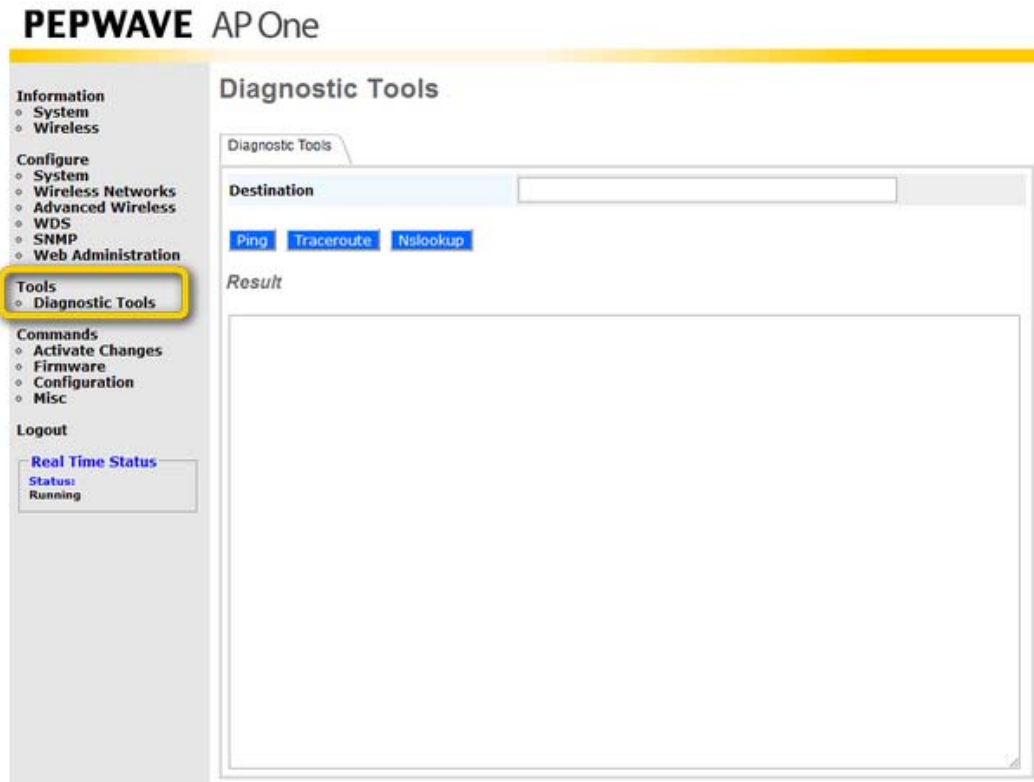


9 Commands

Upon selecting **Commands** from the navigation bar on the left-hand-side of the Main Menu, a list of commands is displayed, as follows:

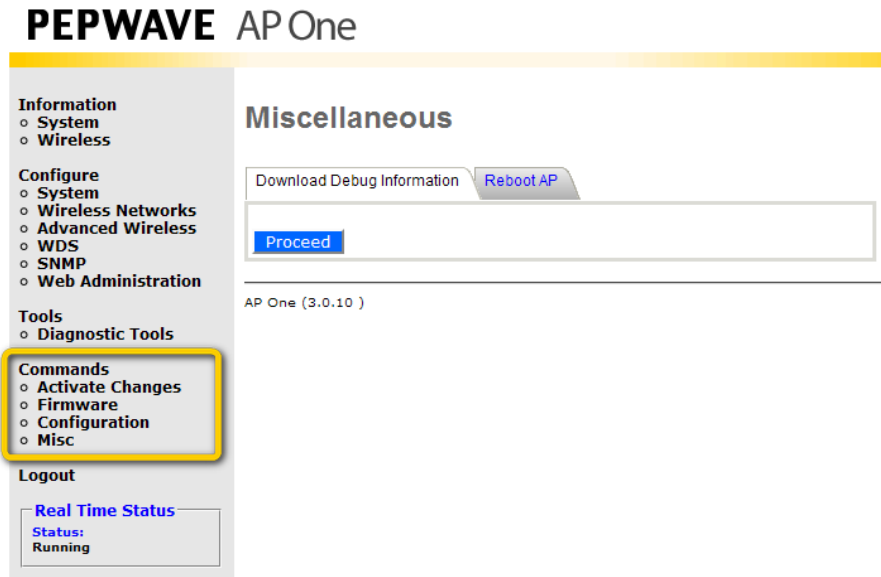

9.1 Activate Changes

Click on **Activate Changes** and a prompt will ask and confirm to save configuration and activate the AP One unit.

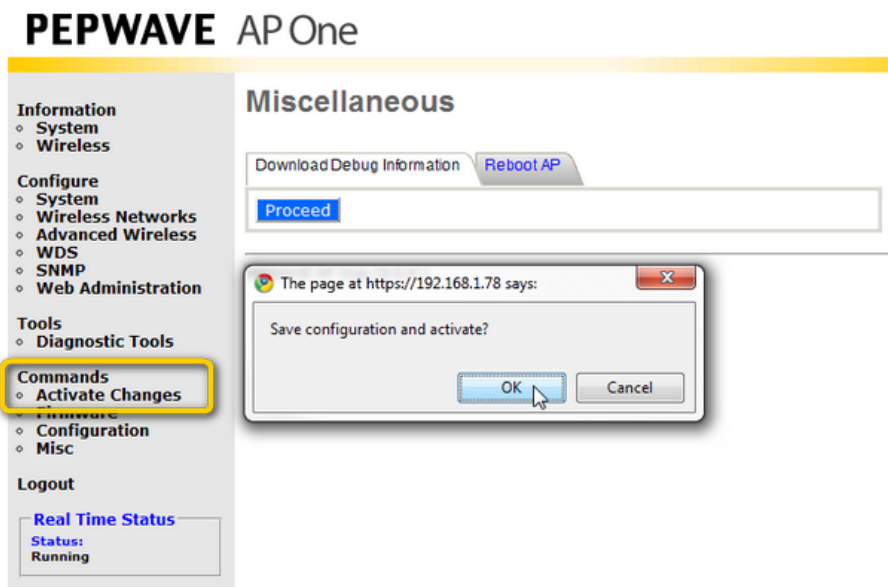

9.2 Firmware

Firmware

Upgrade Firmware

	Flash 1	Flash 2
Firmware Version	3.0.7	3.0.10
Flash Status	Bootable	Bootable
Boot from		⊙
Firmware Upgrade Target	⊙	

Firmware Image File

Commands - Firmware

Firmware Version	This shows the firmware version loaded into the flash partitions.
Flash Status	This shows the firmware status on the flash partitions.
Boot from	This indicates which flash partition boots up the system.
Firmware Upgrade Target	This shows which flash partition is used for firmware upgrade.
Firmware Image File	Upload a firmware file for upgrading the unit's software. A reboot is required after upgrading the firmware.

9.3 Configuration

Configuration

Restore Factory Default | **Download Active Configuration To File** | Upload Configuration File

Preserve Settings Network settings (Server IP, Subnet Mask, Default Gateway, DNS Server, Management VLAN ID)

Proceed

Commands - Configuration

Restore Factory Default	This command is for restoring factory default settings of the AP One. Preserve the network settings by checking the box next to Preserve Settings and select Proceed. Settings including Server IP, Subnet Mask, Default Gateway, DNS Server and Management VLAN ID will be preserved.
Download Active Configuration To File	Select this command to download the active configuration for backup purposes.
Upload Configuration File	Select this command to upload the configuration from a backed up configuration file.

9.4 Misc

Miscellaneous

Download Debug Information **Reboot AP**

Proceed

Commands - Misc

Download Debug Information

Select this comment to download debugging information from the Pepwave AP One unit.

In the event of technical issues, to facilitate prompt resolution by technical support from Pepwave, please send along with a debug file with the support request.

Reboot AP


This option is for rebooting the Pepwave AP One unit.

The Boot up firmware from Flash 1 or 2 can be selected and changed in here.

	Flash 1	Flash 2
Firmware Version	3.0.7	3.0.10
Flash Status	Bootable	Bootable
Boot from		<input checked="" type="radio"/>
Next Boot Target	<input type="radio"/>	<input checked="" type="radio"/>

Proceed


10 Real Time Status

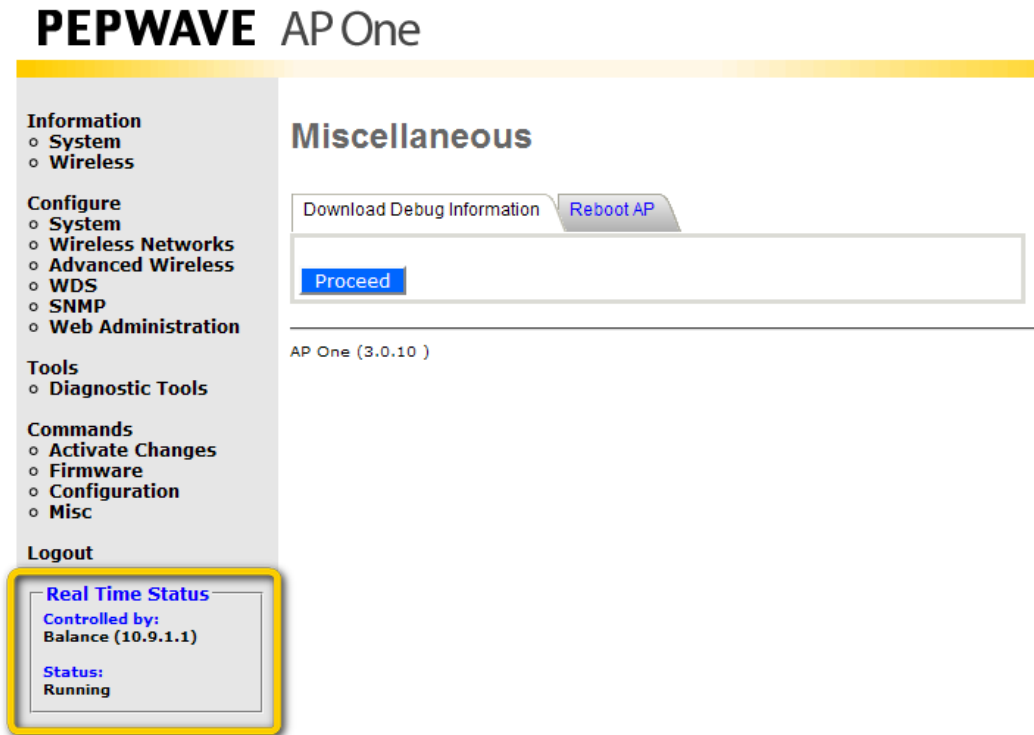

The Real Time Status will show the current status of the device. If the AP One device is managed by an Peplink Balance. The default access of the Balance will be shown as above.

11 Peplink Balance AP Controller

Since firmware 3.0.6, Pepwave AP One devices are allowed to be managed and configured by Peplink Balance. For details, including the Captive Portal configuration or how Peplink Balance works as an AP Controller, please refer to the [Peplink website](#), [FAQs](#) and Peplink Balance User Manual.

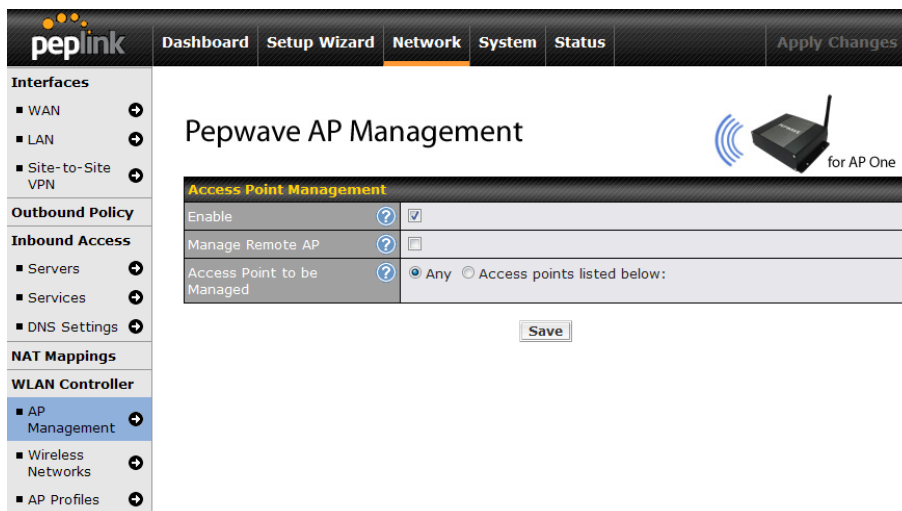

Appendix A.

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- 1) Reorient or relocate the receiving antenna.
- 2) Increase the separation between the equipment and receiver.
- 3) Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- 4) Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

IEEE 802.11b or 802.11g operation of this product in the U.S.A. is firmware-limited to channels 1 through 11.

IMPORTANT NOTE

FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

The availability of some specific channels and/or operational frequency bands are country dependent and are firmware programmed at the factory to match the intended destination.

PEP WAVE

Broadband Possibilities

www.pepwave.com

Contact Us:

Sales

<http://www.pepwave.com/contact/sales/>

Support

<http://www.pepwave.com/contact/>

Business Development and Partnerships

<http://www.pepwave.com/partners/channel-partner-program/>

Address:

United States Office

800 West El Camino Real,
Mountain View

CA 94040

United States

Tel: +1 (650) 331 0641

Fax: +1 (650) 625 4664

Hong Kong Office

17/F, Park Building,
476 Castle Peak Road
Cheung Sha Wan

Hong Kong

Tel: +852 2990 7600

Fax: +852 3007 0588